

Engineering Specification / Submittal


WH-100-H-Y-*S-** (*Non-reversing*)

WH-100-HAC-Y-*S-** (*Reversing*)

WH-100-HW-Y-*S-** (*Non-reversing, with desuperheater*)

WH-100-HACW-Y-*S-** (*Reversing, with desuperheater*)


High Temperature Commercial Water to Water Heat Pump
Single Compressor, Coaxial Coils, R513a, 60 Hz
Nominal Size 9 Ton

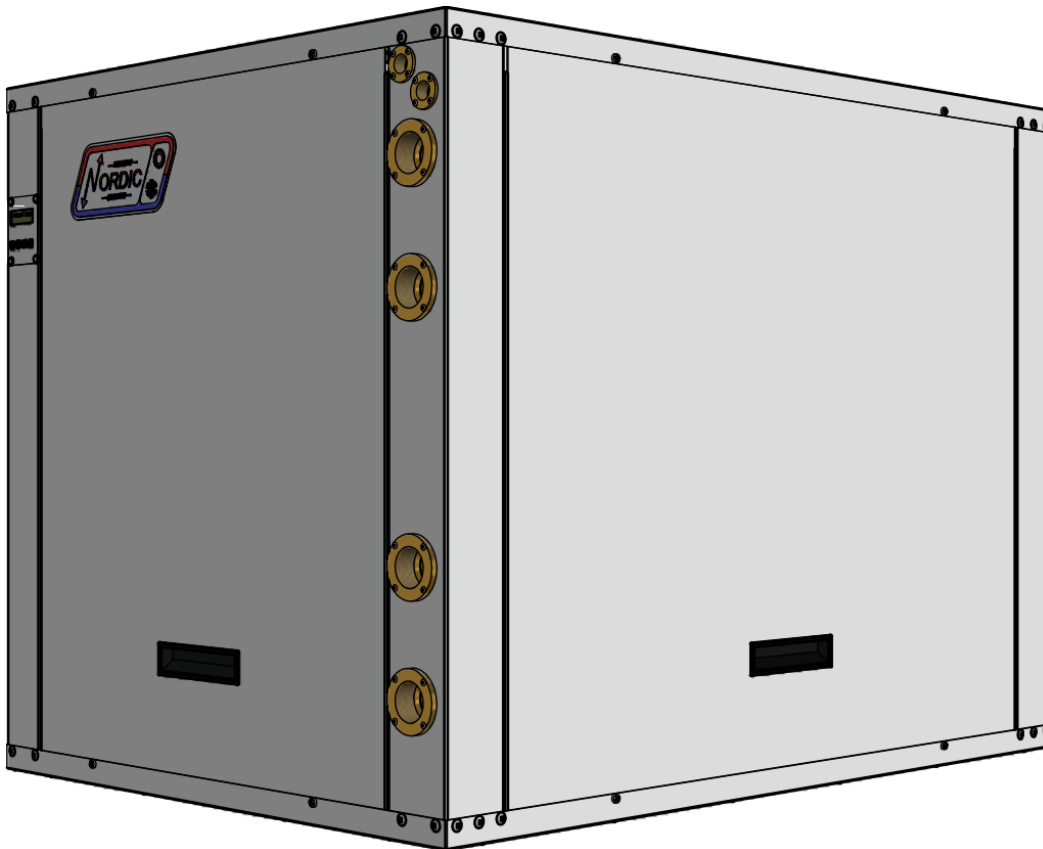

Maritime Geothermal Ltd.
P.O. Box 2555, 170 Plantation Road
Petitcodiac, NB E4Z 6H4
(506) 756-8135

info@nordicghp.com
www.nordicghp.com
002785SPC-01

Model Nomenclature

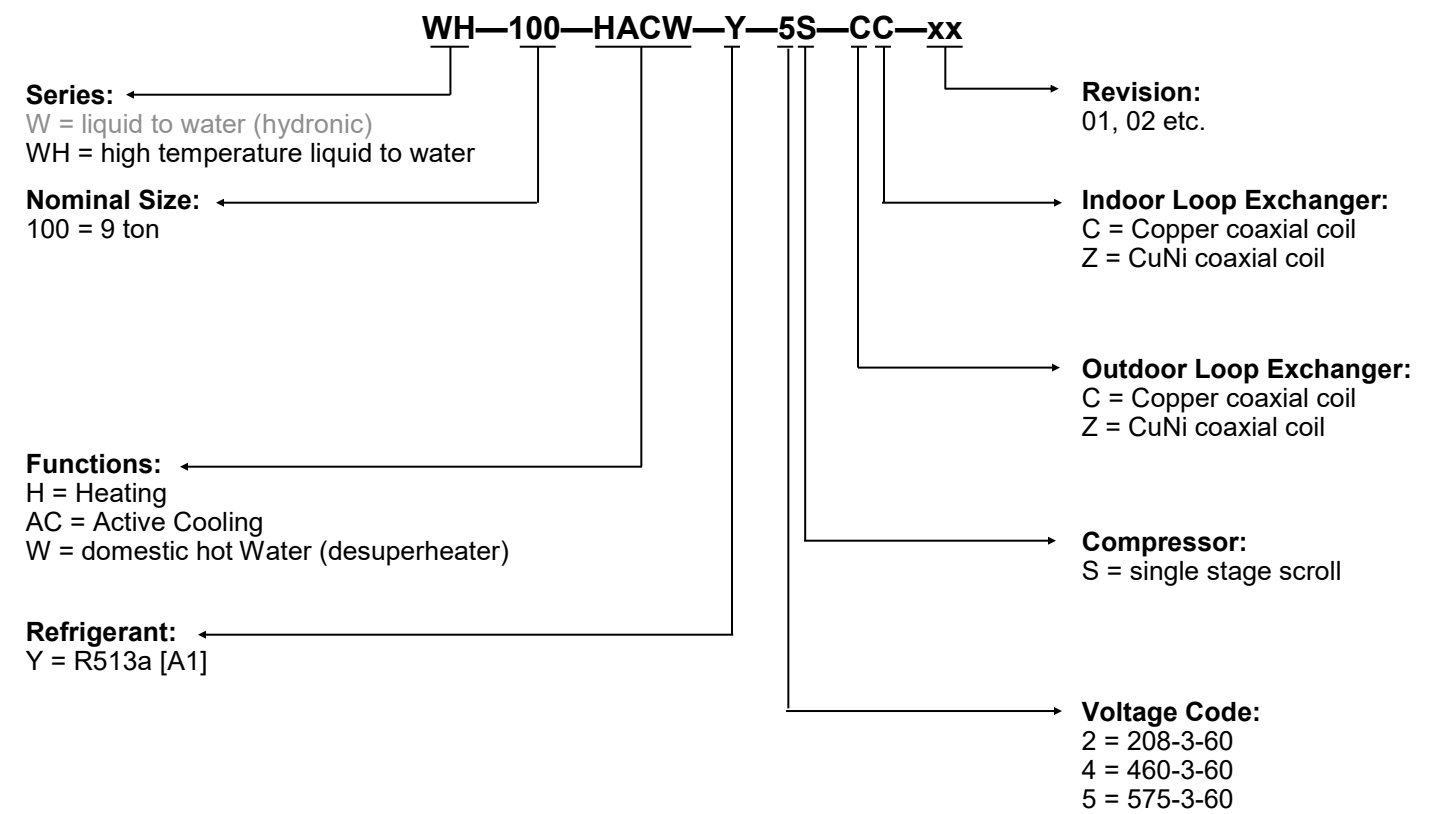

APPLICATION/AVAILABILITY TABLE										
MODEL	FUNCTION	REFRIGERANT	VOLTAGE	COMPR.	OUTDOOR COIL	INDOOR COIL	REVISIONS			
WH-100	H HAC HACW HW	Y	2 4 5	S	C Z	C Z	01			

Maritime Geothermal Ltd. has a continuous improvement policy and reserves the right to modify specification data at any time without prior notice .

Features

- ⇒ **Single compressor** design, with coaxial heat exchangers for good tolerance of open loop conditions
- ⇒ **R513a** refrigerant (GWP=573) is climate change-friendly & complies with 2025 regulations.
Note that R513a is an A1 refrigerant with no special mechanical room considerations.
- ⇒ **High temperature:** 160°F (71°C) hot loop, with source loop at minimum 40°F (4°C)
- ⇒ **TUV listed** (CSA/UL/ETL equivalent)

Refrigeration Circuit

- Copeland scroll compressor w/ suction accumulator
- Dual-grommet-mounted compressor for reduced noise and vibration
- Insulated coaxial heat exchangers and piping, available in copper or cupro-nickel (CuNi)
- High and low pressure & suction temperature sensors
- solid core filter-dryer
- sight glass
- Electronic Expansion Valve (EEV)
- Optional reversing valve
- Optional desuperheater for passive domestic hot water heating (-HW and -HACW models)

Loop Connections



- 1-1/4" brass FNPT fittings for loop connections
- temperature sensor on each water line

Electrical & Control

- 2 x 16 LCD display for control and data access
- USB port for complete data access using laptop computer and provided software; including real-time charting, data logging, and diagnostic functionality with manual override operation
- Advanced control board with BACnet MS/TP interface for remote control and data access including all sensor data & alarm conditions
- 3-phase protection
- Dry contacts for external pump control


Frame & Enclosure

- heavy duty cabinet constructed of satin galvanized steel with powder coat finish and 1/2" / 1" insulation
- Access panels on all four sides, serviceable from two; swing out electrical box for compressor access

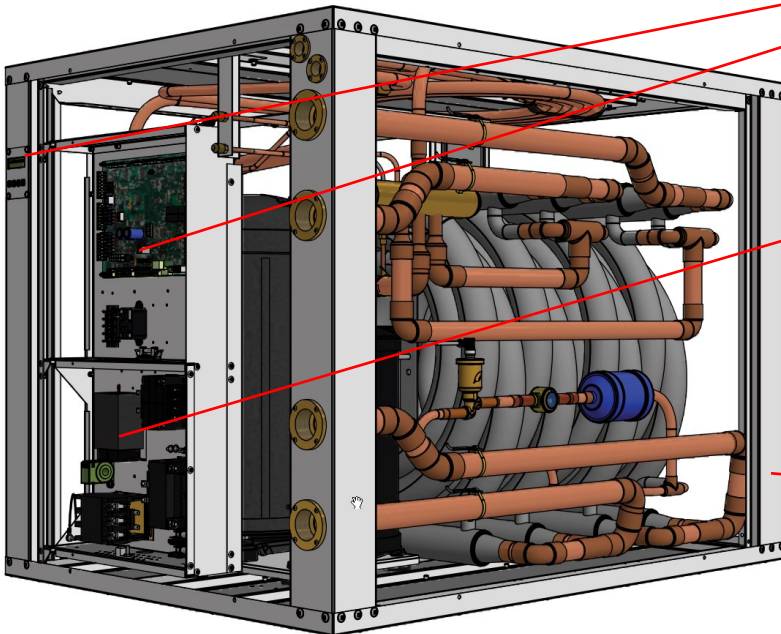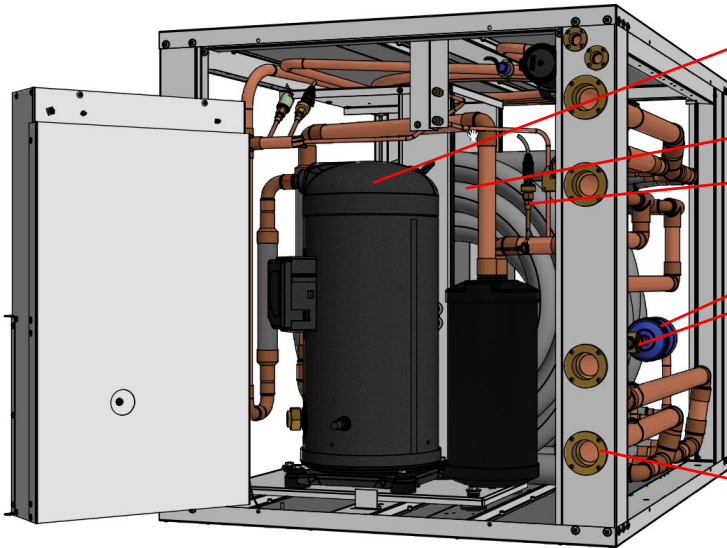


Dimensions: H/HAC Models

All dimensions in inches.

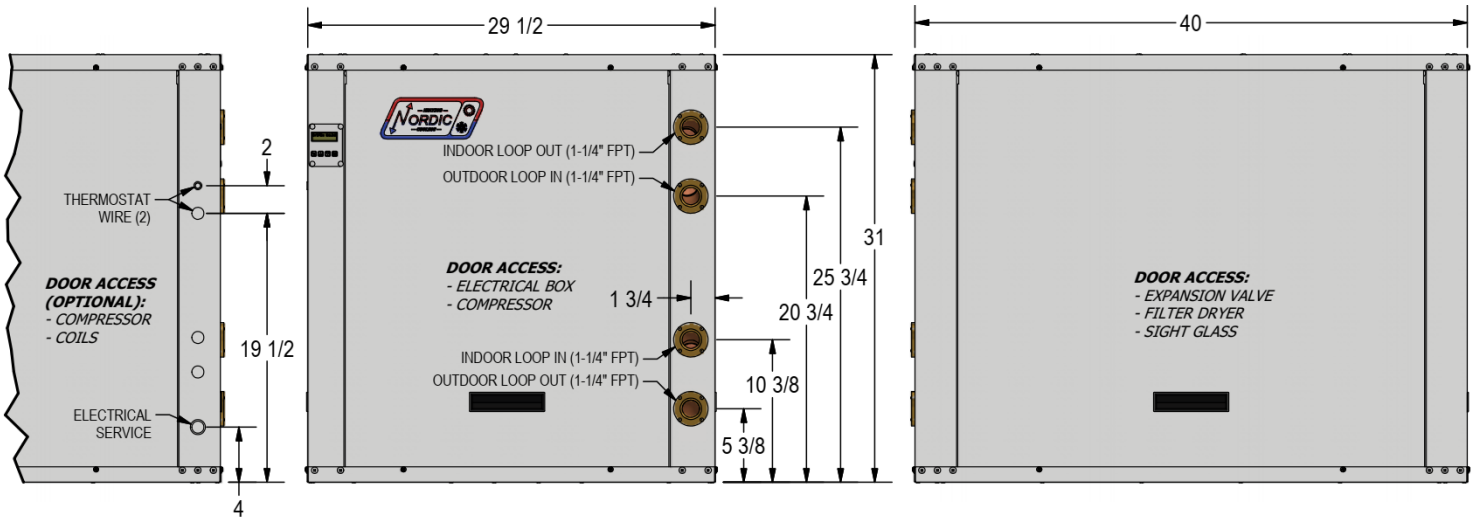

Dimensions: HW/HACW Models (with desuperheater)

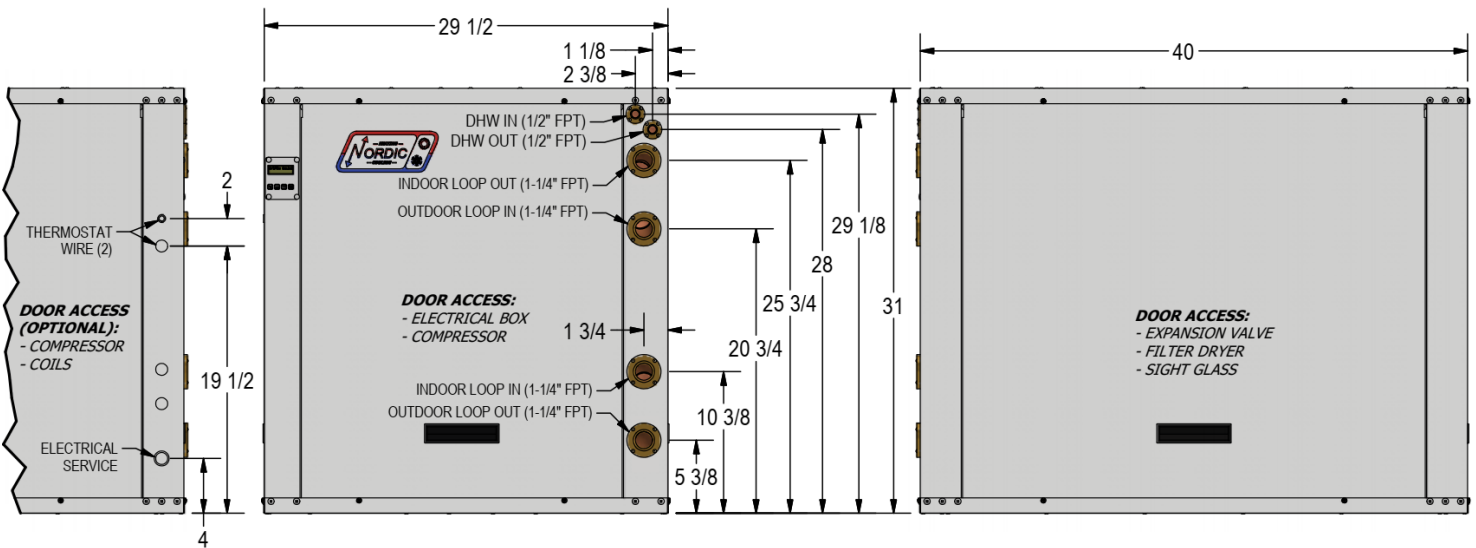

LEFT SIDE
CLEARANCE
OPTIONAL

RECOMMENDED
FRONT CLEARANCE:
3 FT

RECOMMENDED
RIGHT SIDE CLEARANCE:
3 FT

NO BACK SIDE CLEARANCE REQUIRED

Specifications

Electrical Specifications (R454b)

MODEL	Nomenclature Identifier	Power Supply			Compressors (each)		FLA	MCA	Maximum Fuse/Breaker	Minimum Wire Size
		V-ø-Hz	MIN	MAX	RLA	LRA	Amps	Amps	Amps	ga
WH-100	2	208-3-60	187	229	29.5	195	30.4	37.8	60	#6-3
	4	460-3-60	414	506	13.1	95	14.0	17.3	30	#10-3
	5	575-3-60	518	632	12.5	80	13.4	16.5	30	#10-3

Refrigerant Charge



MODEL	TYPE	lb	kg	OIL
WH-100	R513a	17	7.7	POE

- Oil capacity is marked on the compressor label.
- Refrigerant charge is **subject to revision; actual charge is indicated on the unit nameplate.**

Shipping Information

MODEL	WEIGHT lb. (kg)	DIMENSIONS in (cm)		
		L	W	H
WH-100	700 (318)	46 (117)	46 (117)	36 (92)

WH-SERIES Operating Temperature Limits

Loop	Mode	Parameter	(°F)	(°C)	Note
Indoor Loop	HEATING (indoor is hot loop)	Minimum EWT	70 - 110	21 - 43	Use formula (Outdoor EWT + 20°F) or (Outdoor EWT + 11°C). Lower temperatures require 0-10VDC modulating water valve, or manual flow reduction at startup.
		Maximum LWT	160	71	
	COOLING (reversing HAC units only, indoor is cold loop)	Minimum LWT  32	32	0	EWT should normally be 40°F (4°C) or greater.
		Maximum ELT	90	32	0-10VDC modulating water valve required on indoor loop above this temperature, or manual flow reduction at startup
Outdoor Loop	HEATING (outdoor is cold loop)	Minimum LWT  32	32	0	EWT should normally be 40°F (4°C) or greater.
		Maximum ELT	90	32	0-10VDC modulating water valve required on outdoor loop above this temperature to limit suction pressure (contact Engineering for firmware revision of this feature)
	COOLING (reversing HAC units only, outdoor is hot loop)	Minimum EWT	70 - 110	21 - 43	Use formula (Outdoor EWT + 20°F) or (Outdoor EWT + 11°C). Lower temperatures require 0-10VDC modulating water valve.
		Maximum LLT/LWT	160	71	

EWT: Entering Water Temperature

LWT: Leaving Water Temperature

Values in these tables are for rated liquid and water flows.

Specifications

Recommended Flow Rates				
MODEL	OUTDOOR LOOP		INDOOR LOOP (MAX. 130°F)	
	gpm(US)	L/s	gpm(US)	L/s
WH-100	28	1.8	28	1.8

Heat Pump Holdup Volumes				
MODEL	OUTDOOR LOOP		INDOOR LOOP (SINGLE WALL '-PP')	
	US gal	L	US gal	L
WH-100	3.05	11.5	3.30	12.5

Pressure Drop Data
(US UNITS)

		OUTDOOR LOOP & INDOOR LOOP				
		water 130°F	water 104°F	water 50°F	15% methanol 32°F	35% prop. glycol 32°F
WH-100	USgpm	psi	psi	psi	psi	psi
	16	1.8	1.8	1.9	2.2	2.9
	20	2.4	2.4	2.6	3.3	4.3
	24	3.6	3.6	3.9	4.6	6.0
	28	4.7	4.7	5.0	5.8	7.6
	32	6.3	6.3	6.5	7.3	9.6

METRIC

Pressure Drop Data
(METRIC UNITS)

		OUTDOOR LOOP & INDOOR LOOP				
		water 130°F	water 104°F	water 50°F	15% methanol 32°F	35% prop. glycol 32°F
WH-100	L/s	kPa	kPa	kPa	kPa	kPa
	1.0	12	12	13	15	20
	1.3	17	17	18	23	30
	1.5	25	25	27	32	41
	1.8	32	32	34	40	52
	2.0	43	43	45	50	66

Performance Tables - WH-Series

WH-100-H***-Y-*S-CC R513a, 60 Hz, ZH40KCE-TFD (460-3-60)

* Cooling via reversing models (-HAC), or switching indoor/outdoor
 ** Lower cooling mode outdoor loop ELT's may require flow control
 † Compressor current is for 460-3-60.
 [Multiply by 2.2 for 208-3-60, by 0.8 for 575-3-60.]

HEATING	OUTDOOR LOOP (Water)						ELECTRICAL		INDOOR LOOP (Water)						
	ELT (°F)	Evap. Temp.	Flow (gpm)	LLT (°F)	Delta T (°F)	Heat Abs. (Btu/hr)	Compressor Current (A) [†]	Input Power (W)	EWT (°F)	Cond. Temp.	Flow (gpm)	LWT (°F)	Delta T (°F)	Heating (Btu/hr)	COP _H
	50	39	28	47	-3.5	49,400	9.8	6,180	115	127	28	120	5.0	69,800	3.31
	60	48	28	56	-4.3	60,900	10.0	6,299	114	127	28		5.9	81,700	3.80
	70	57	28	65	-5.3	73,800	10.2	6,429	113	128	28		6.8	95,000	4.33
	80	66	28	74	-6.3	88,300	10.4	6,581	112	128	28		7.9	110,100	4.90
	90	75	28	83	-7.5	104,400	10.7	6,762	111	129	28		9.1	126,800	5.50
	50	39	28	47	-3.0	42,200	11.0	7,488	135	146	28	140	4.8	67,000	2.62
	60	49	28	56	-3.7	51,800	11.1	7,580	135	146	28		5.5	77,000	2.98
	70	58	28	66	-4.4	61,800	11.3	7,679	134	147	28		6.3	87,300	3.33
	80	67	28	75	-5.2	72,600	11.5	7,793	133	147	28		7.1	98,500	3.70
	90	76	28	84	-6.0	83,800	11.7	7,932	132	148	28		8.0	110,200	4.07
	50	42	28	48	-2.4	33,600	12.5	9,014	155	166	28	160	4.6	63,600	2.07
	60	50	28	57	-3.0	41,400	12.7	9,124	155	166	28		5.2	71,800	2.31
	70	59	28	67	-3.5	49,500	12.8	9,235	154	167	28		5.8	80,300	2.55
	80	68	28	76	-4.1	57,500	13.0	9,357	154	167	28		6.4	88,700	2.78
90	77	28	85	-4.7	65,700	13.2	9,496	153	167	28	7.1		97,400	3.01	

COOLING*	ELT (°F)	Cond. Temp.	Flow (gpm)	LLT (°F)	Delta T (°F)	Heat Rej. (Btu/hr)	Compressor Current (A)†	Input Power (W)	EWT (°F)	Evap. Temp.	Flow (gpm)	LWT (°F)	Delta T (°F)	Cooling (Btu/hr)	EER
	50	74	28	55	5.2	72,800	6.8	3,407	54	36	28	49	-4.5	62,200	18.3
	55	79	28	60	5.1	71,800	6.9	3,535		36	28	49	-4.4	60,800	17.2
	60	84	28	65	5.1	70,900	7.0	3,670		37	28	49	-4.3	59,400	16.2
	65	89	28	70	5.0	69,800	7.0	3,820		37	28	49	-4.2	57,800	15.1
	70	95	28	75	4.9	68,700	7.1	3,979		38	28	50	-4.0	56,100	14.1
	75	100	28	80	4.8	67,400	7.2	4,148		38	28	50	-3.9	54,300	13.1
	80	105	28	85	4.8	66,300	7.4	4,333		39	28	50	-3.8	52,500	12.1
	85	110	28	90	4.7	65,000	7.5	4,533		39	28	50	-3.6	50,500	11.1
	90	115	28	95	4.6	63,700	7.7	4,742		40	28	50	-3.5	48,500	10.2
	95	120	28	100	4.5	62,400	7.8	4,971		40	28	50	-3.4	46,400	9.3

METRIC

HEATING	OUTDOOR LOOP (Water)						ELECTRICAL		INDOOR LOOP (Water)						
	ELT (°C)	Evap. Temp.	Flow (L/s)	LLT (°C)	Delta T (°C)	Heat Abs. (kW)	Compressor Current (A) [†]	Input Power (W)	EWT (°C)	Cond. Temp.	Flow (L/s)	LWT (°C)	Delta T (°C)	Heating (kW)	COP _H
	10.0	3.9	1.8	8.1	-1.9	14.5	9.8	6,180	46.1	52.6	1.8	49	2.8	20.5	3.31
	15.6	8.9	1.8	13.2	-2.4	17.8	10.0	6,299	45.6	52.9	1.8		3.3	23.9	3.80
	21.1	13.9	1.8	18.2	-2.9	21.6	10.2	6,429	45.1	53.2	1.8		3.8	27.8	4.33
	26.7	18.9	1.8	23.2	-3.5	25.9	10.4	6,581	44.5	53.4	1.8		4.4	32.3	4.90
	32.2	23.9	1.8	28.0	-4.2	30.6	10.7	6,762	43.8	53.7	1.8		5.1	37.2	5.50
	10.0	4.1	1.8	8.3	-1.7	12.4	11.0	7,488	57.3	63.3	1.8	60	2.7	19.6	2.62
	15.6	9.2	1.8	13.5	-2.1	15.2	11.1	7,580	56.9	63.6	1.8		3.1	22.6	2.98
	21.1	14.3	1.8	18.7	-2.4	18.1	11.3	7,679	56.5	63.8	1.8		3.5	25.6	3.33
	26.7	19.4	1.8	23.8	-2.9	21.3	11.5	7,793	56.1	64.0	1.8		3.9	28.9	3.70
	32.2	24.4	1.8	28.9	-3.3	24.6	11.7	7,932	55.6	64.2	1.8		4.4	32.3	4.07
	10.0	5.3	1.8	8.7	-1.3	9.8	12.5	9,014	68.6	74.3	1.8	71	2.6	18.6	2.07
	15.6	10.2	1.8	13.9	-1.7	12.1	12.7	9,124	68.2	74.6	1.8		2.9	21.0	2.31
	21.1	15.2	1.8	19.2	-1.9	14.5	12.8	9,235	67.9	74.8	1.8		3.2	23.5	2.55
	26.7	20.1	1.8	24.4	-2.3	16.9	13.0	9,357	67.6	75.0	1.8		3.6	26.0	2.78
	32.2	25.0	1.8	29.6	-2.6	19.3	13.2	9,496	67.2	75.2	1.8		3.9	28.5	3.01

COOLING*	ELT (°C)	Cond. Temp.	Flow (L/s)	LLT (°C)	Delta T (°C)	Heat Rej. (W)	Compressor Current (A)†	Input Power (W)	EWT (°C)	Evap. Temp.	Flow (L/s)	LWT (°C)	Delta T (°C)	Cooling (W)	COP _c
	10.0	23	1.8	12.9	2.9	21.3	6.8	3,407	12.0	2	1.8	9.5	-2.5	18.2	5.36
	12.8	26	1.8	15.6	2.8	21.0	6.9	3,535		2	1.8	9.6	-2.4	17.8	5.04
	15.6	29	1.8	18.4	2.8	20.8	7.0	3,670		3	1.8	9.6	-2.4	17.4	4.75
	18.3	32	1.8	21.1	2.8	20.5	7.0	3,820		3	1.8	9.7	-2.3	16.9	4.43
	21.1	35	1.8	23.8	2.7	20.1	7.1	3,979		3	1.8	9.8	-2.2	16.4	4.13
	23.9	38	1.8	26.6	2.7	19.8	7.2	4,148		3	1.8	9.8	-2.2	15.9	3.84
	26.7	40	1.8	29.4	2.7	19.4	7.4	4,333		4	1.8	9.9	-2.1	15.4	3.55
	29.4	43	1.8	32.0	2.6	19.0	7.5	4,533		4	1.8	10.0	-2.0	14.8	3.25
	32.2	46	1.8	34.8	2.6	18.7	7.7	4,742		4	1.8	10.1	-1.9	14.2	2.99
	35.0	49	1.8	37.5	2.5	18.3	7.8	4,971		5	1.8	10.1	-1.9	13.6	2.73

002785SPC-01

Engineering Guide Specifications

General

The water-to-water heat pump shall be a single packaged single refrigeration circuit heating / cooling unit, with optional desuperheating circuit for domestic hot water heating. The unit shall be listed by a nationally recognized safety-testing laboratory (NRTL), such as TUV, ETL, UL, or CSA. The unit shall be rated in accordance with applicable standards of the Air Conditioning, Heating, and Refrigeration Institute / International Standards Organization (AHRI/ISO) and/or Canadian Standards Association (CSA). The liquid source water to water heat pump unit, as manufactured by Maritime Geothermal, Petitcodiac, New Brunswick, shall be designed to operate correctly within liquid temperature ranges specified on the "Minimum and Maximum Operating Temperatures" page of this engineering specification document.

Factory Quality

Each unit shall be run tested at the factory with water circulating through the indoor and outdoor loops. Quality control system checks shall include: computerized nitrogen pressurized leak test, evacuation of refrigeration circuit to sustained vacuum, accurate system charge, detailed heating and cooling mode tests, and quality cross check all operational and test conditions to pass/fail criteria. Units tested without water flow are not acceptable. The units shall be warranted by the manufacturer against defects in materials and workmanship in accordance with the warranty section at the end of this document. Optional extended factory warranty coverage may be available.

Cabinet

Each unit shall be enclosed in a sheet metal cabinet. Cabinet shall be constructed of powder coated galvanized sheet metal of minimum 20 gauge. Sheet metal gauge shall be higher where structurally required. Design and construction of cabinet shall be such that it is rigid and passes the CSA/UL Loading Test requirements (200 lb roof test and 25 lb guard test). All panels shall be lined with minimum 1/2 inch [12.7 mm] thick acoustic type glass fiber insulation. All insulation shall meet the fire retardant provisions of NFPA 90A. This material shall also provide acoustical benefit. The unit must have a minimum of three access panels for serviceability of the compressor compartment. Units having only one access panel to compressor/heat exchangers/expansion device/refrigerant piping shall not be acceptable. The electrical box shall have separate holes and knockouts for entrance of line voltage and low voltage control wiring. All factory-installed wiring passing through factory knockouts and openings shall be protected from sheet metal edges at openings by plastic grommets.

Refrigerant Circuit

All units shall contain only one sealed refrigerant circuit, containing a hermetic motor scroll compressor, Electronic Expansion Valve (EEV), coaxial heat exchangers, factory installed high and low pressure sensors, manual reset high pressure switch, service ports, liquid line filter-drier, sight glass, and suction accumulator.

Refrigerant used shall have a global warming potential (GWP) of less than 700 and shall have an A1 classification (non-flammable).

Compressors shall be specified for heat pump duty with internal isolation consisting of rubber vibration isolators and mounting plate with rubber vibration isolators. Compressor motors shall have internal high temperature overload protection.

The water to refrigerant heat exchangers shall consist of a steel outer jacket with twisted copper inner tube, designed and certified for 600 psig [4136 kPa] working pressure on the refrigerant side and 450 psig [3108 kPa] on the water side. Heat exchangers headered together in parallel shall use a reverse-return or symmetrical arrangement on the water side and symmetrical arrangement on the refrigerant side to ensure even flow splitting. Heat exchangers shall be insulated over all of their outside surface with minimum 3/8" thick closed cell insulation. Insulation consisting of 1/8" closed-cell insulating tape shall not be acceptable. Cupro-nickel (CuNi) inner tube shall be available as a factory option.

The electronic expansion valve shall be of stepper-motor rather than pulsing type, and shall provide proper superheat control over the unit's operating range with minimal deviation from superheat setpoint. Superheat shall be determined through the suction pressure-temperature method. Externally mounted pressure controlled water regulating flow valves or thermostatic expansion valves (TXV's) in place of electronic expansion valves are not acceptable.

The suction accumulator shall be insulated with minimum 3/8" thick closed cell insulation to prevent condensation. The accumulator's internal oil return port shall be sized properly for the unit's operating range. To ensure proper oil return, suction accumulator shall not be 'oversized'.

Piping and Connections

The unit shall have two sets of primary water in and out connections (for indoor and outdoor loops). The primary connection type shall be 1-1/4" nominal female National Pipe Thread (NPT). Domestic hot water (desuperheater) water connectors shall be 1/2" nominal female National Pipe Thread (NPT). All water connectors shall be rigidly mounted to cabinet with corrosion resistant fasteners to prevent relative movement. All water connectors shall be constructed of copper or brass material for corrosion resistance.

All internal water and refrigerant piping shall be insulated with minimum 3/8" thick closed cell insulation. Insulation consisting of 1/8" closed-cell insulating tape shall not be acceptable.

Electrical

Controls and safety devices shall be factory wired and mounted within the unit. Controls shall include 24 volt alternating current (24VAC) activated compressor contactors, reversing valves, and 24VAC 100VA transformer with built in circuit breaker or fused on both primary and secondary sides. Units shall be name-plated for use with time delay fuses or circuit breakers. Unit controls shall be 24VAC and provide heating or cooling as required by the remote thermostat or on-board controller. 3-phase protection shall be present in each unit to protect the compressor against loss of phase and reverse rotation. 3-phase protection shall be factory installed. Unit shall have dry contacts for controlling loop circulating pumps via an external 24VAC contactor. Unit shall provide remote fault indication to the control system via serial communication and fault messages on front panel LCD display.

Unit Control

The control system shall have the following features:

1. Anti-short cycle time delay on compressor operation. Time delay shall be a minimum of 5 minutes, for both thermostat demand and safety control reset starts. An override shall be provided to disable this delay for unit commissioning and testing purposes.
2. Random compressor start delay of 0-120 seconds on unit power up to facilitate starting multiple units after a power failure.
3. Flow switch on outdoor loop, and also on indoor loop for reversing units.
4. Compressor shutdown for high or low refrigerant pressures, low flow conditions and for phase protection faults.
5. Automatic intelligent reset: unit shall automatically restart 5 minutes after trip if the fault has cleared. Should a fault reoccur 3 times sequentially then permanent lockout shall occur, requiring cycling of the power to the unit in order to reset.
6. Manual reset high pressure in case of electronic board failure.
7. The low pressure shall not be monitored for the first 90 seconds after a compressor start to prevent nuisance safety trips.
8. 2 x 16 backlit Liquid Crystal Display (LCD) and four buttons for limited data access. Unit may be configured for stand alone operation with optional temperature sensor(s)
9. Universal Serial Bus (USB) port for full data access and diagnostic information, including real-time charting and data-logging
10. BACnet connectivity for control by building automation system, and providing alarm feedback.

Maritime Geothermal works continually to improve its products. As a result, the design and specifications of any product may be changed without notice. Please contact Maritime Geothermal at 1-506-756-8135 or visit www.nordicghp.com for latest design and specifications. Purchaser's approval of this data set signifies that the equipment is acceptable under the provisions of the job specification. Statements and other information contained herein are not express warranties and do not form the basis of any commercial contract or other agreement between any parties, but are merely Maritime Geothermal's statement of opinion regarding its products.

Warranty: W/WH-Commercial Series

COMMERCIAL LIMITED EXPRESS WARRANTY

Unless a statement is specifically identified as a warranty, statements made by Maritime Geothermal Ltd. ("MG") or its representatives relating to MG's products, whether oral, written or contained in any sales literature, catalogue or agreement, are not express warranties and do not form a part of the basis of the bargain, but are merely MG's opinion or commendation of MG's products.

SET FORTH HERE IS THE ONLY EXPRESS WARRANTY THAT APPLIES TO MG'S PRODUCTS. MG MAKES NO WARRANTY AGAINST LATENT DEFECTS. MG MAKES NO WARRANTY OF MERCHANTABILITY OF THE GOODS OR OF THE FITNESS OF THE GOODS FOR ANY PARTICULAR PURPOSE.

LIMITED EXPRESS COMMERCIAL WARRANTY - PARTS

MG warrants its Commercial Class products, purchased and retained in the United States of America and Canada, to be free from defects in material and workmanship under normal use and maintenance as follows:

- (1) Heat pumps / chillers built or sold by MG for one (1) year from the Warranty Inception Date (as defined below).
- (3) Compressors of above units for five (5) years from the Warranty Inception Date (as defined below).
- (4) Other accessories, when purchased separately, for (1) year from the date of shipment from MG.

The "Warranty Inception Date" shall be the date of original unit installation, as per the date on the installation Startup Record; or sixty (60) days from date of unit shipment from MG, whichever comes first.

To make a claim under this warranty, parts must be returned to MG in Petitcodiac, New Brunswick, freight prepaid, no later than ninety (90) days after the date of the failure of the part. If MG determines the part to be defective and within MG's Limited Express Commercial Warranty, MG shall, when such part has been either replaced or repaired, return such to a factory recognized distributor, dealer or service organization, freight prepaid. The warranty on any part repaired or replaced under warranty expires at the end of the original warranty period.

LIMITED EXPRESS COMMERCIAL WARRANTY - LABOUR

MARITIME GEOTHERMAL LTD. will not be responsible for any consequential damages or labour costs incurred.

This warranty does not cover and does not apply to:

- (1) Air filters, fuses, refrigerant, fluids, oil.
- (2) Products relocated after initial installation.
- (3) Any portion or component of any system that is not supplied by MG, regardless of the cause of the failure of such portion or component.
- (4) Products on which the unit identification tags or labels have been removed or defaced.
- (5) Products on which payment to MG, or to the owner's seller or installing contractor, is in default.
- (6) Products subjected to improper or inadequate installation, including but not limited to:
 - Indoor or outdoor loop flow lower than listed in engineering specification or as expressly approved by MARITIME GEOTHERMAL LTD.
 - Operating the heat pump either manually or with automated controls so that the unit is forced to function outside its normal operating range
 - Disabling of safety controls
 - Insufficient loop antifreeze concentration for loop temperature, or antifreeze concentration incorrectly set in control board
 - Fouled heat exchangers due to poor water quality
 - Failure to use strainers or clean them regularly
 - Impact or physical damage sustained by the heat pump
 - Poor refrigeration maintenance practices, including brazing without nitrogen flow, or using wrong braze/flux
 - Incorrect voltage or missing phase supplied to unit
 - Unit modified electrically or mechanically from factory supplied condition
 - Water quality outside of recommended limits (e.g. salinity or pH)
 - Unit not mounted with supplied anti-vibration grommets when specified for use
 - Corrosion damage due to corrosive ambient environment
 - Failure due to excessive cycling caused by improper mechanical setup or improperly programmed external controller
 - Physical loads or pressures placed on unit from external equipment
- (7) Mold, fungus or bacteria damage
- (8) Corrosion or abrasion of the product.
- (9) Products supplied by others.
- (10) Electricity or fuel, or any increases or unrealized savings in same, for any reason whatsoever.

MG is not responsible for:

- (1) The costs of fluids, refrigerant or system components **supplied by others**, or associated **labour** to repair or replace the same, which is incurred as a result of a defective part covered by MG's Limited Commercial Warranty.
- (2) The costs of **labour**, refrigerant, materials, or service incurred in diagnosis and removal of defective part, or in obtaining and replacing the new or repaired part.
- (3) Transportation costs of the defective part from the installation site to MG, or of the return of that part if warranty coverage declined.
- (4) The costs of normal maintenance.

MG'S LIABILITY UNDER THE TERMS OF THIS LIMITED WARRANTY SHALL APPLY ONLY TO THE MG UNITS REGISTERED WITH MG THAT BEAR THE MODEL AND SERIAL NUMBERS STATED ON THE INSTALLATION START UP RECORD, AND MG SHALL NOT, IN ANY EVENT, BE LIABLE UNDER THE TERMS OF THIS LIMITED WARRANTY UNLESS THIS INSTALLATION START UP RECORD HAS BEEN ENDORSED BY OWNER & DEALER/INSTALLER AND RECEIVED BY MG LIMITED WITHIN 90 DAYS OF START UP.

Limitation: This Limited Express Commercial Warranty is given in lieu of all other warranties. If, notwithstanding the disclaimers contained herein, it is determined that other warranties exist, any such express warranty, including without limitation any express warranties or any implied warranties of fitness for particular purpose and merchantability, shall be limited to the duration of the Limited Express Commercial Warranty.

LIMITATION OF REMEDIES

In the event of a breach of the Limited Express Commercial Warranty, MG will only be obligated at MG's option to repair the failed part or unit, or to furnish a new or rebuilt part or unit in exchange for the part or unit which has failed. If after written notice to MG's factory in Petitcodiac, New Brunswick of each defect, malfunction or other failure, and a reasonable number of attempts by MG to correct the defect, malfunction or other failure, and the remedy fails of its essential purpose, MG shall refund the purchase price paid to MG in exchange for the return of the sold good(s). Said refund shall be the maximum liability of MG. **THIS REMEDY IS THE SOLE AND EXCLUSIVE REMEDY OF THE BUYER OR PURCHASER AGAINST MG FOR BREACH OF CONTRACT, FOR THE BREACH OF ANY WARRANTY OR FOR MG'S NEGLIGENCE OR IN STRICT LIABILITY.**

LIMITATION OF LIABILITY

MG shall have no liability for any damages if MG's performance is delayed for any reason or is prevented to any extent by any event such as, but not limited to: any war, civil unrest, government restrictions or restraints, strikes, or work stoppages, fire, flood, accident, shortages of transportation, fuel, material, or labour, acts of God or any other reason beyond the sole control of MG. **MG EXPRESSLY DISCLAIMS AND EXCLUDES ANY LIABILITY FOR CONSEQUENTIAL OR INCIDENTAL DAMAGE IN CONTRACT, FOR BREACH OF ANY EXPRESS OR IMPLIED WARRANTY, OR IN TORT, WHETHER FOR MG'S NEGLIGENCE OR AS STRICT LIABILITY.**

OBTAINING WARRANTY PERFORMANCE

Normally, the dealer or service organization who installed the products will provide warranty performance for the owner. Should the installer be unavailable, contact any MG recognized distributor, dealer or service organization. If assistance is required in obtaining warranty performance, write or call Maritime Geothermal Ltd.

NOTE: Some states or Canadian provinces do not allow limitations on how long an implied warranty lasts, or the limitation or exclusions of consequential or incidental damages, so the foregoing exclusions and limitations may not apply to you. This warranty gives you specific legal rights, and you may also have other rights which vary from state to state and from Canadian province to Canadian province.